



NATURAL STONE RANGE

Eliminating the Risks of Water Staining, Curling and Warping in Natural Stone Installations

RAPIDRY FORMULA

'RAPIDRY FORMULA' 'locks' the mix water within the mortar, virtually eliminating the risk of water staining, curling and warping.


MICROTEC® fibre reinforced technology

Fibre reinforced technology and specially developed cements and polymers for maximum open time, slump resistance and yield.

ARDEX S 27

MICROTEC® Natural Stone Wall and Floor Tile Adhesive


- No admix required
- Grout after 2 hours
- 60 minute pot life

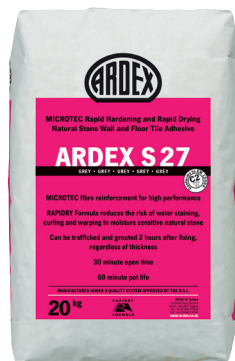

ARDEX MG

Marble and Natural Stone Tile Grout


- Walkable after 90 minutes
- For tile joints up to 8mm
- Available in 5 colours



ARDEX S 28

MICROTEC® Semi-Pourable Natural Stone Floor Tile Adhesive

- No admix required
- Ideal for solid bed fixing large format floor tiles and slabs
- Grout after 2 hours
- 60 minute pot life

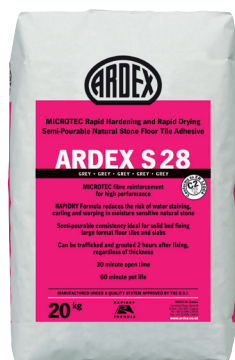


ARDEX ST

Elastic Silicone Sealant

- Excellent resistance to weather, UV-radiation and commonly used cleaning chemicals and disinfectants
- Contains fungicide to combat mould growth
- Available in 7 colours



NATURAL STONE INSTALLATION SYSTEMS

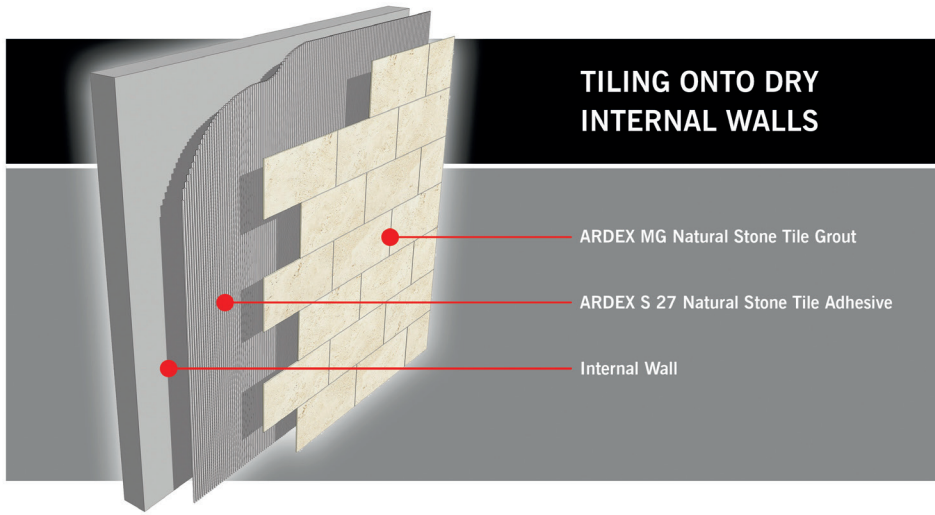


TILING ONTO DRY INTERNAL WALLS

ARDEX MG Natural Stone Tile Grout

ARDEX S 27 Natural Stone Tile Adhesive

Internal Wall

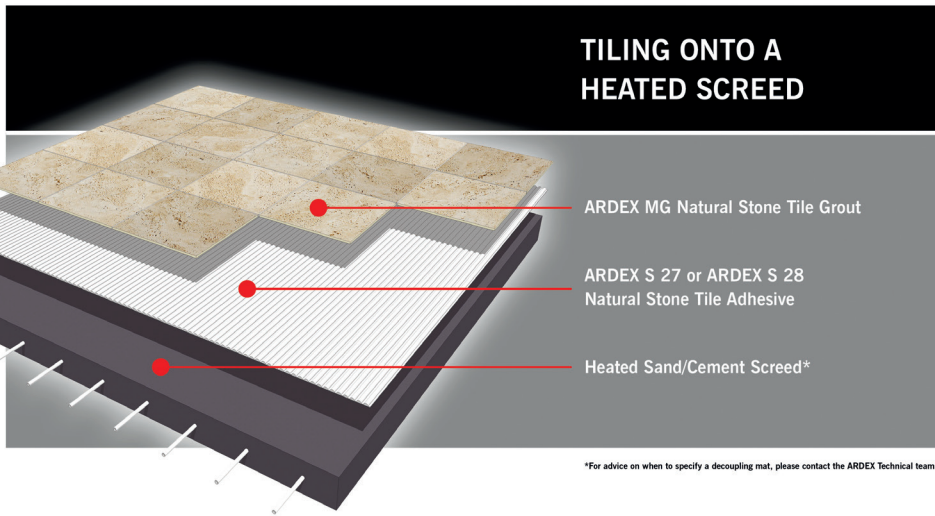


TILING ONTO A HEATED SCREED

ARDEX MG Natural Stone Tile Grout

ARDEX S 27 or ARDEX S 28 Natural Stone Tile Adhesive

Heated Sand/Cement Screed*

*For advice on when to specify a decoupling mat, please contact the ARDEX Technical team.

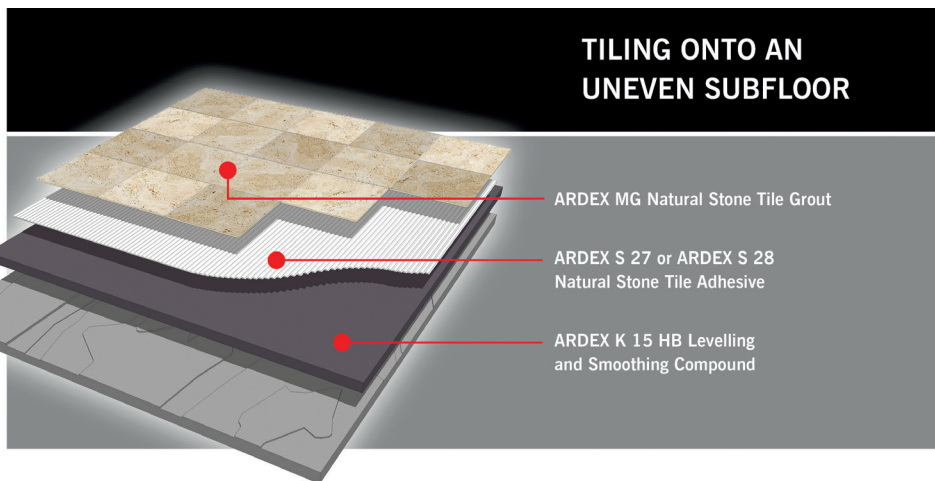


TILING ONTO AN UNEVEN SUBFLOOR

ARDEX MG Natural Stone Tile Grout

ARDEX S 27 or ARDEX S 28 Natural Stone Tile Adhesive

ARDEX K 15 HB Levelling and Smoothing Compound

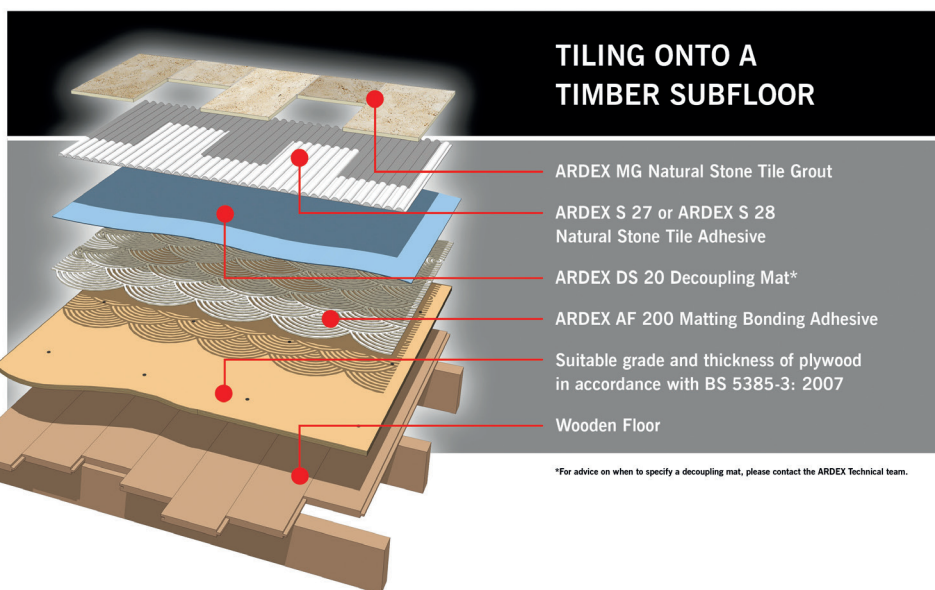

TILING ONTO A TIMBER SUBFLOOR

ARDEX MG Natural Stone Tile Grout

ARDEX S 27 or ARDEX S 28 Natural Stone Tile Adhesive

ARDEX DS 20 Decoupling Mat*

ARDEX AF 200 Matting Bonding Adhesive

Suitable grade and thickness of plywood in accordance with BS 5385-3: 2007

Wooden Floor

*For advice on when to specify a decoupling mat, please contact the ARDEX Technical team.



BEST INNOVATION



ARDEX UK Limited,
Homefield Road, Haverhill, Suffolk CB9 8QP
Tel: 01440 714939 Email: info@ardex.co.uk

www.ardex.co.uk

 ARDEX UK

 @ARDEXUKtiling