

亞德士 X60 PU FLEX



Fix all Tile Types to Problematic Substrates

特殊基層專用彈性PU膠黏劑

Two-Part Reaction Resin Tile Adhesive

雙組份樹脂反應型膠黏材

Ideal for fixing all tile types to problematic substrates such as fibreglass, steel and PVC coverings, and for tiling in areas sensitive to moisture.

適用於GRP、玻璃纖維、不銹鋼、鋁板、PVC飾面等特殊基面的瓷磚、石材、馬賽克黏貼



NO PRIMING REQUIRED
不需底塗

ARDEX X 60 PU FLEX 為雙組份聚氨酯黏著劑，適用於黏接磚材於特殊基層，如玻璃纖維或鋼板材。此產品亦適合用於天然石材、不銹鋼及PVC面材，並在完全乾燥後具有防水功能


ARDEX X 60 PU FLEX 適合用於室內，也可用於室內對水氣敏感的材質，如：聚合板、膠合板、石膏板、石膏纖維板、纖維水泥板…等。

室內、外、牆、地面皆可

適用於泳池、Spa、水瀑區及預期變形量大基面黏貼應用
反應型樹脂無白華顧慮

ARDEX X 60 PU FLEX is a two-part polyurethane adhesive, ideal for fixing all tile types to problematic substrates such as fibreglass and steel. It is also suitable for adhering natural stone, aluminium and PVC coverings, and is water resistant when fully cured.

ARDEX X 60 PU FLEX is suitable for use in exterior areas, and can also be used on interior substrates sensitive to moisture e.g. particle boards, plywood, plasterboard, gypsum fibre boards, fibre cement boards and plaster slabs.

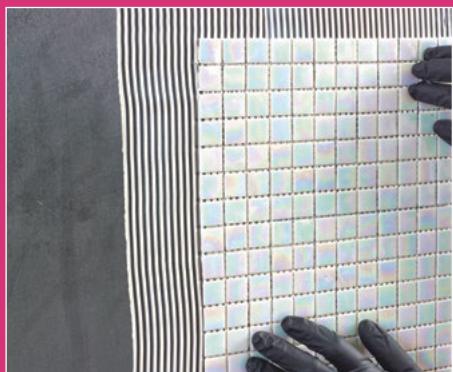

金屬基面 **STEEL**



PVC 基面 **PVC COVERINGS**



現有磚面 **EXISTING TILES**



玻璃纖維 **FIBREGLASS (GRP)**

ARDEX X 60 PU FLEX

雙組份樹脂反應型膠黏材 Two-Part Reaction Resin Tile Adhesive



Pot Life

桶中待料時間45分鐘

Working Time

可操作時間60分鐘

Light Foot Traffic

3小時可開放步行

Grout After

3小時後可接續填縫

Coverage

耗用量3mm齒溝每組約1m²

Packing

3kg/組



攪拌程序 Mixing:

符合歐盟EN12004 R2T等級



將半份的B劑倒入A劑中 Add half of PART B to PART A.



以慢速攪拌混合 Mix with a drill and paddle on a slow speed.



充份拌合後 加入剩餘的B劑
When fully mixed, add the remainder of PART B to the mix.



再次攪拌至顏色充份混合
Continue mixing until a uniform coloured paste is achieved.

ARDEX X 60 PU FLEX



特殊基層專用彈性PU膠黏劑



台灣亞德士
02 - 8245 7737

 @ARDEXTaiwan
info@ardex.com.tw

 台灣亞德士
www.ardex.com.tw